

Light Towers - Compact Vertical Mast

Light Towers



**WACKER
NEUSON**
all it takes!



Versatile light towers deliver exceptional lighting


The LTV4L and LTV6L light towers combine the features and performance of traditional light towers in a small footprint. They are ideally suited for illuminating general job sites, site prep, concrete pours, specialty events, parking lots, road work and bridge work. The adjustable vertical mast extends 23 feet and can rotate 360 degrees for optimum lighting flexibility.

- Compact design and foldable tongue allow transportation of up to 18 units on a 48 foot flatbed truck. Additionally, less space is taken up on site and in rental yards.
- Extended service intervals of 1,000 hours between oil changes lowers cost of ownership.
- Fast set-up times and a 45-gallon fuel tank extends lighting time
- Available with Kohler engines. All models feature a Mecc Alte generator end
- Metal halide or LED lamps provide lighting for any application

Light Towers - Compact Vertical Mast Technical specifications

	LTV4L	LTV6L	LTV6L LED
Operating data			
L x W x H in	101 x 58 x 99	101 x 58 x 99	101 x 58 x 99
Operating weight lb	1,650	1,770	1,770
Shipping weight lb	1,310	1,430	1,430
Illumination coverage at 5 fc (54 lux) ft ²	5,582	9,230	5,582
Lamp type	LED	Metal Halide	LED
Mast height ft	23	23	23
Sound level (LwA) at 23 ft (7 m) dB(A)	68.8	67.9	67.9
Power kW	4.1	6	6
Frequency Hz	60	60	60
Voltage V	120	120	120
Power factor cos Φ 1~	1	1	1
Engine / Motor			
Generator model	Brushless	Brushless	Brushless
Generator insulation (class)	H	H	H
Idle to full load %	10	10	10
Voltage control (+/-) %	6	6	6
Engine / Motor manufacturer	Kohler (KDW702)	Kohler (LDW1003)	Kohler (LDW1003)
Engine / Motor type	Liquid-cooled 2-cylinder	Liquid-cooled 3-cylinder	Liquid-cooled 3-cylinder
Fuel type	Diesel	Diesel	Diesel
Displacement in ³	41.9	62.7	62.7
Operating performance hp	8	12.2	12.2
at rpm rpm	1,800	1,800	1,800
Rated performance	ISO 3046 IFN	ISO 3046 IFN	ISO 3046 IFN
Tank capacity (Oil) US qt	5.5	4	4
Tank capacity (Fuel) US gal	45.8	45.8	45.8
Fuel consumption (Prime Load) US gal/h	0.47	0.72	0.72
Runtime 100% Prime Load h	92	60.5	60.5
Runtime 4 Lights Only h	187	98.8	151

Light Towers - Compact Vertical Mast Dimensions

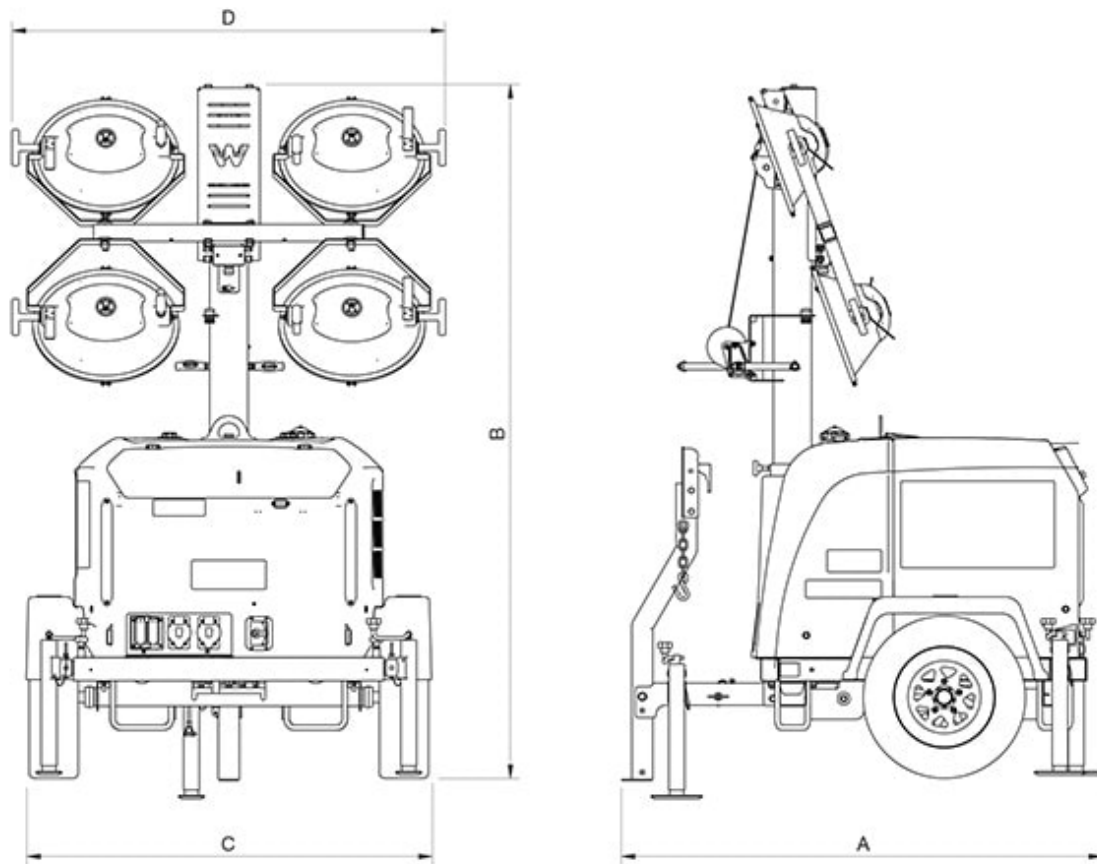

A	Length with tongue up	67 in
A	Length with tongue down	101 in
B	Mast height retracted	8.2 ft
B	Mast height extended	23 ft
C	Width with outriggers retracted	58 in
C	Width with outriggers extended	118.5 in
D	Width	62 in

Please note: that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions. Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2022 Wacker Neuson SE.